



ISO 9001


동력전달용품

hanyang  14M-200S-68

hanyang  8M-40S-62




(株) 韓 洋 工 業
hanyang trading co.,ltd.



TIMING PULLEY L



L

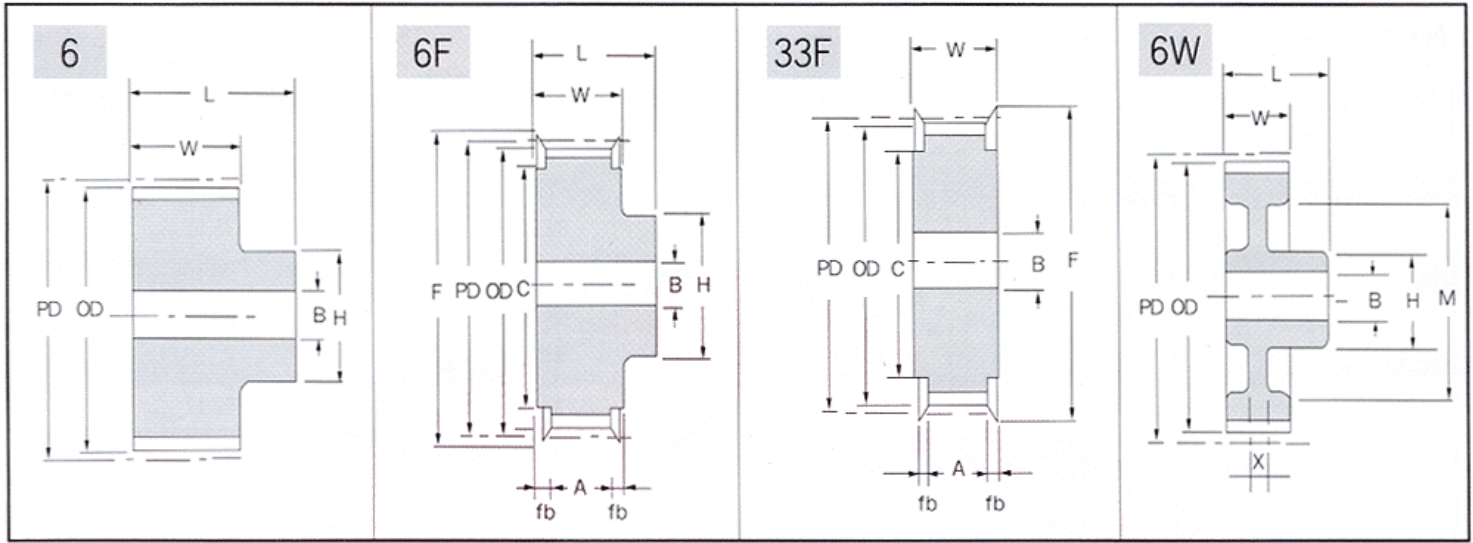

BELT WIDTH	037	050	075	100	150	200
W	15.50	19.10	25.40	31.80	44.60	58.10
A	10.60	14.20	20.50	26.90	26.90	53.20
fb	2.45	2.45	2.45	2.45	2.45	2.45

[mm]

NT	OD	F	L			X			M	PULLEY TYPE				
			050	075	100	050	075	100		B	L			
10	29.56	35	21	7	29	38	45				33F, 6F	33F, 6F	33F, 6F	
12	35.62	45	27	8	32	38	45				33F, 6F	33F, 6F	33F, 6F	
14	41.68	48	30	10	32	38	45				33F, 6F	33F, 6F	33F, 6F	
16	47.75	55	34	12	35	41	48				33F, 6F	33F, 6F	33F, 6F	
18	53.81	61	36	12	35	41	48				33F, 6F	33F, 6F	33F, 6F	
19	56.84	67	37	12	35	41	48				33F, 6F	33F, 6F	33F, 6F	
20	59.88	67	38	12	35	41	48				33F, 6F	33F, 6F	33F, 6F	
21	62.91	70	39	12	37	43	49				33F, 6F	33F, 6F	33F, 6F	
22	65.94	76	40	21	38	45	51				33F, 6F	33F, 6F	33F, 6F	
24	72.00	83	42	12	38	45	51				33F, 6F	33F, 6F	33F, 6F	
26	78.07	88	42	12	38	45	54				33F, 6F	33F, 6F	33F, 6F	
28	84.13	95	44	12	38	45	57				33F, 6F	33F, 6F	33F, 6F	
30	90.20	99	44	12	38	45	57				33F, 6F	33F, 6F	33F, 6F	
32	96.26		45	16	41	48	57				6	6	6	
34	102.32		45	16	41	48	57				6	6	6	
36	108.39		48	16	41	48	57				6	6	6	
38	115.45		50	16	41	48	57				6	6	6	
40	120.51		50	16	41	48	57				6	6	6	
42	126.58		50	16	41	48	57				6	6	6	
44	132.64		52	16	41	48	57	6	7	8	109	6W	6W	6W
46	138.71		52	16	41	48	57	6	7	8	115	6W	6W	6W
48	144.77		52	16	41	48	57	6	7	8	121	6W	6W	6W
60	181.15		56	16	41	48	57	6	7	8	156	6W	6W	6W
72	217.53		60	20	41	48	57	6	7	8	190	6W	6W	6W

[mm]



TIMING PULLEY L



[mm]				
NT	PD	OD	C	F
10	30.32	25.56 ^{+0.08} ₀	25.01 ⁰ _{-0.03}	35
11	33.35	32.59 ^{+0.08} ₀	27.51 ⁰ _{-0.03}	40
12	36.38	35.62 ^{+0.08} ₀	31.06 ⁰ _{-0.04}	45
13	39.41	38.65 ^{+0.08} ₀	31.06 ⁰ _{-0.04}	45
14	42.45	41.68 ^{+0.08} ₀	36.06 ⁰ _{-0.04}	48
15	45.48	44.72 ^{+0.08} ₀	36.06 ⁰ _{-0.04}	52
16	48.51	47.75 ^{+0.08} ₀	41.06 ⁰ _{-0.04}	55
17	51.54	50.78 ^{+0.10} ₀	46.06 ⁰ _{-0.04}	58
18	54.57	53.81 ^{+0.10} ₀	46.06 ⁰ _{-0.05}	61
19	57.61	56.84 ^{+0.10} ₀	51.17 ⁰ _{-0.05}	67
20	60.64	59.88 ^{+0.10} ₀	51.17 ⁰ _{-0.05}	67
21	63.67	62.91 ^{+0.10} ₀	56.17 ⁰ _{-0.05}	70
22	66.70	65.94 ^{+0.10} ₀	61.17 ⁰ _{-0.05}	76
23	69.73	68.97 ^{+0.10} ₀	61.17 ⁰ _{-0.05}	76
24	72.77	72.00 ^{+0.10} ₀	66.17 ⁰ _{-0.05}	83
25	75.80	75.04 ^{+0.10} ₀	66.17 ⁰ _{-0.05}	83
26	78.83	78.07 ^{+0.10} ₀	71.17 ⁰ _{-0.05}	88
27	81.86	81.10 ^{+0.10} ₀	71.17 ⁰ _{-0.05}	88
28	84.89	84.13 ^{+0.10} ₀	75.17 ⁰ _{-0.05}	95
29	87.93	87.16 ^{+0.10} ₀	75.17 ⁰ _{-0.05}	95
30	90.96	90.20 ^{+0.10} ₀	80.17 ⁰ _{-0.05}	99
31	93.99	93.23 ^{+0.10} ₀	85.26 ⁰ _{-0.05}	103
32	97.02	96.26 ^{+0.10} ₀	85.26 ⁰ _{-0.05}	103
33	100.05	99.29 ^{+0.10} ₀	90.26 ⁰ _{-0.05}	111
34	103.08	102.32 ^{+0.13} ₀	95.26 ⁰ _{-0.05}	115
35	106.12	105.35 ^{+0.13} ₀	95.26 ⁰ _{-0.05}	115
36	109.15	108.39 ^{+0.13} ₀	100.26 ⁰ _{-0.05}	119
37	112.18	111.42 ^{+0.13} ₀	100.26 ⁰ _{-0.05}	119
38	115.21	114.45 ^{+0.13} ₀	100.26 ⁰ _{-0.05}	123
39	118.24	117.48 ^{+0.13} ₀	105.26 ⁰ _{-0.05}	127
40	121.28	120.51 ^{+0.13} ₀	110.26 ⁰ _{-0.05}	131
41	124.31	123.55 ^{+0.13} ₀	115.26 ⁰ _{-0.05}	135
42	127.34	126.58 ^{+0.13} ₀	115.26 ⁰ _{-0.05}	135
43	130.37	129.61 ^{+0.13} ₀	120.26 ⁰ _{-0.05}	140
44	133.40	132.64 ^{+0.13} ₀	120.26 ⁰ _{-0.05}	140

[mm]				
NT	PD	OD	C	F
45	136.44	135.67 ^{+0.13} ₀	125.38 ⁰ _{-0.06}	144
46	139.47	138.71 ^{+0.13} ₀	125.38 ⁰ _{-0.06}	148
47	142.50	141.74 ^{+0.13} ₀	130.38 ⁰ _{-0.06}	152
48	145.53	144.77 ^{+0.13} ₀	130.38 ⁰ _{-0.06}	152
49	148.56	147.80 ^{+0.13} ₀	135.38 ⁰ _{-0.06}	156
50	151.60	150.83 ^{+0.13} ₀	140.38 ⁰ _{-0.06}	160
51	154.63	154.63 ^{+0.13} ₀	140.38 ⁰ _{-0.06}	160
52	157.66	157.66 ^{+0.13} ₀	145.38 ⁰ _{-0.06}	168
53	160.69	160.69 ^{+0.13} ₀	145.38 ⁰ _{-0.06}	168
54	163.72	163.72 ^{+0.13} ₀	150.38 ⁰ _{-0.06}	172
55	166.75	166.75 ^{+0.13} ₀	155.38 ⁰ _{-0.06}	172
56	169.79	169.79 ^{+0.13} ₀	169.79 ⁰ _{-0.06}	176
57	172.82	172.82 ^{+0.13} ₀	172.82 ⁰ _{-0.06}	180
58	175.85	175.85 ^{+0.13} ₀	175.85 ⁰ _{-0.06}	184
59	178.88	178.88 ^{+0.15} ₀	178.88 ⁰ _{-0.06}	188
60	181.91	181.91 ^{+0.15} ₀	181.91 ⁰ _{-0.06}	188
61	184.95	184.95 ^{+0.15} ₀	184.95 ⁰ _{-0.06}	192
62	187.98	187.98 ^{+0.15} ₀	187.98 ⁰ _{-0.06}	196
63	191.01	191.01 ^{+0.15} ₀	191.01 ⁰ _{-0.06}	169
64	194.04	194.04 ^{+0.15} ₀	194.04 ⁰ _{-0.06}	200
65	197.07	197.07 ^{+0.15} ₀	197.07 ⁰ _{-0.07}	203
66	200.11	200.11 ^{+0.15} ₀	200.11 ⁰ _{-0.07}	206
67	203.14	203.14 ^{+0.15} ₀	203.14 ⁰ _{-0.07}	209
68	206.17	206.17 ^{+0.15} ₀	206.17 ⁰ _{-0.07}	212
69	209.20	209.20 ^{+0.15} ₀	209.20 ⁰ _{-0.07}	215
70	212.23	212.23 ^{+0.15} ₀	212.23 ⁰ _{-0.07}	218
71	215.27	215.27 ^{+0.15} ₀	215.27 ⁰ _{-0.07}	221
72	218.30	218.30 ^{+0.15} ₀	218.30 ⁰ _{-0.07}	225
73	221.33	221.33 ^{+0.15} ₀	218.30 ⁰ _{-0.07}	228
74	224.36	224.36 ^{+0.15} ₀	224.36 ⁰ _{-0.07}	231
75	227.39	227.39 ^{+0.15} ₀	227.39 ⁰ _{-0.07}	234
76	230.43	230.43 ^{+0.15} ₀	230.43 ⁰ _{-0.07}	237
77	233.46	233.46 ^{+0.15} ₀	233.46 ⁰ _{-0.07}	240
78	236.49	236.49 ^{+0.15} ₀	236.49 ⁰ _{-0.07}	243
79	239.52	239.52 ^{+0.15} ₀	239.52 ⁰ _{-0.07}	246